

ALUMINUM COVER & GALVANIZED STEEL SINGLE DOOR SAFEMAX™ **SMOKE VENT, ROOFTOP CLOSE WITH ELECTRICAL OPENING MECHANISM**

> **CATEGORY: SMOKE VENTS** SKU: BSVSB-S1R









TOLL FREE PHONE: 1-800-431-8651




EMAIL: info@bestroofhatches.com



1-888-828-6021

www.BestRoofHatches.com

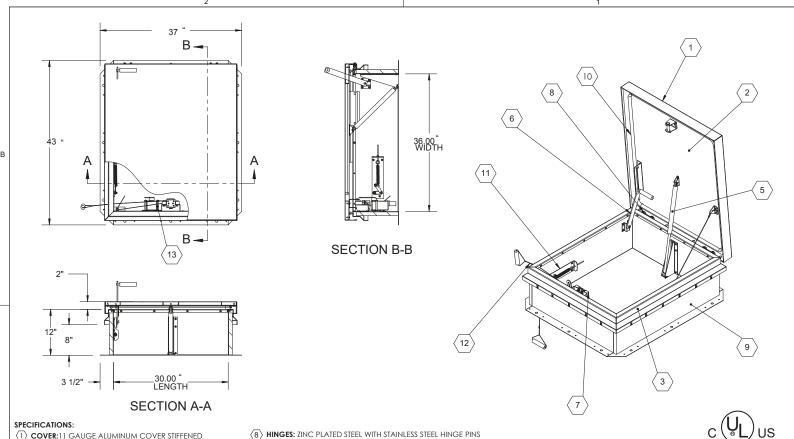

- 1 COVER:11 GAUGE ALUMINUM COVER STIFFENED TO WITHSTAND A LIVE LOAD OF 40 PSF WITH A MAX DEFLECTION OF 1/150 OF THE SPAN
- (2) LINER: 18 GAUGE ALUMINUM
- (3) CURB AND COUNTERFLASH W/ EZ TAB: 14 GAUGE GALVANNEAL
- 4 FINISH: COVER MILL
 - CURB PWD COAT PAINT, HIGH REFLECTANCE WHITE
- (5) GAS SPRING WITH DAMPER: DESIGNED TO OPEN AGAINST A 10PSF SNOW LOAD IN NOT LESS THAN 2 SECONDS
- (6) HOLD OPEN ARM: LOCK COVER IN FULLY OPEN POSITION -ZINC PLATED STEEL
- (7) LATCH: ZINC PLATED ROTARY LATCH ASSEMBLY DESIGNED TO HOLD COVERS CLOSED AGAINST 30 PSF WIND UPLIFT ZINC PLATED STEEL LATCH STRIKERS ON COVERS

- (9) INSULATION: 1" POLYISOCYANURATE IN COVER AND AROUND CURB PERIMETER, R-VALUE 6
- (10) GASKET: ADHESIVE BACKED EPDM RUBBER EXTRUSION
- (11) THERMAL RELEASE MECHANISM: VENT COVERS OPEN THERMALLY BY HEAT AT FUSIBLE LINK TEMPERATURE 165 °F
- (12) MANUAL OPENING: VENT COVERS OPEN WITH INTERNAL AND EXTERNAL MANUAL PULL HANDLE, 1/16" DIA SST CABLE
- (13) ELECTRICAL RELEASE: VENT COVERS OPEN ELECTRICALLY WHEN ENERGIZED WITH 24VAC/DC



SMOKE VENT SIZE 36 (WIDTH) x 30 (LENGTH)

ARCHITECT CONTRACTOR: QTY: BSVSB PART#: Smoke Vent SafeMAX Series Alum, Sngl Dr, Sngl Wall Curb NAME DATE SIZE DWG. NO. BSVSB_X_S1__R Α BMH 05/04/11 DS 05/04/11 WEIGHT: VARIES

X 30 S1L 165 R

Α

SHEET 1 OF 2

PROJECT:

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.

2