

## GALVANIZED STEEL QUAD DOOR ACOUSTICMAX™ 48 SMOKE VENT, MANUAL WINCH

CATEGORY: SMOKE VENTS
SKU: BSVX-QNW









**TOLL FREE PHONE:** 1-800-431-8651




info@bestroofhatches.com



1-888-828-6021

www.BestRoofHatches.com

B — SECTION B-B

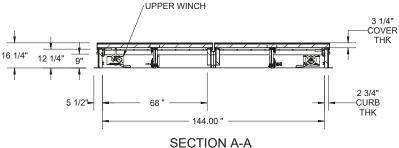



- (1) COVER: 14 GAUGE GALVANNEAL COVER STIFFENED TO WITHSTAND A LIVE LOAD OF 40 PSF WITH A MAX DEFLECTION OF 1/150 OF THE SPAN
- 2 LINER: 14 GAUGE GALVANNEAL
- ③ CURB AND COUNTERFLASH W/ EZ TAB: DBL WALL CURB, 14 GAUGE GALVANNEAL
- 4 FINISH: COVER -
- POWDER COAT, HIGH REFLECTANCE WHITE, BLACK INTERIOR CURB POWDER COAT, BLACK
- (5) GAS SPRING WITH DAMPER: DESIGNED TO OPEN AGAINST A 10PSF SNOW LOAD IN NOT LESS THAN 2 SECONDS
- (6) HOLD OPEN ARM: LOCKS COVER IN FULLY OPEN POSITION ZINC PLATED STEEL
- (7) LATCH: ZINC PLATED ROTARY LATCH ASSEMBLY DESIGNED TO HOLD COVERS CLOSED AGAINST 90 PSF WIND UPLIFT ZINC PLATED STEEL LATCH STRIKERS ON COVERS

- 8 HINGES: 304 STAINLESS STEEL BUTT HINGE WITH 1/4" PIN
- (9) INSULATION: MINERAL WOOL W/ SOUND MAT, R-VALUE 10
- (10) GASKETS: ADHESIVE BACKED EPDM RUBBER EXTRUSION ON CURB AND COVER
- 12 MANUAL OPERATION:

  THERMALLY BY HEAT AT FUSIBLE LINK TEMPERATURE 165 °F

VENT COVERS OPEN WITH EXTERNAL MANUAL PULL HANDLE, 1/16" DIA SST CABLE AND VENT COVERS OPEN AND CLOSE WITH MANUAL WINCH, 100FT 1/8" DIA CABLE

- 13 ELECTRICAL RELEASE: NONE
- 4 BURGLAR BARS: NONE
- 15 SOUND RATING: STC48 PER ASTME90, OITC 36 PER ASTME1332

SMOKE VENT SIZE 66"(WIDTH) x 144"(LENGTH)

LOWER WINCH

C US

PROJECT:						
ARCHITECT:						
CONTRACTOR:						
QTY:						
PART#:				BSVXG66X144Q2N165W		
				TITLE: Smoke Vent, Acoustical S 66x144, Quad Doo Galvn Steel, Black Pwd, Wht Pw Wall Curb	r,	bl
	NAME	DATE	SIZE	DWG. NO.		REV
DRAWN	ELW	4/15/14	Α	BSVXG66X144Q2N165W A		
RELEASED	ELW	4/15/14	WE	IGHT: VARIES	SHEET 1	OF 2

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.

2