

ROOF HATCH - CENDREX

CATEGORY: GALVANIZED STEEL


SKU: TRH




Your odd sizes:
Made in 5 days

DIMENSIONS AND APPEARANCE

HATCH SIZE - W x H INCHES (MM)	EXTERIOR SIZE - W x H INCHES (MM)	NUMBER OF LOCKS	WEIGHT LBS	KG
36 x 30 (914 x 762)	42 x 36 (1067 x 914)	1	178	81
36 x 36 (914 x 914)	42 x 42 (1067 x 1067)	1	188	85

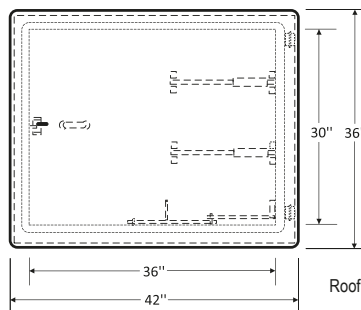

Roof opening = size of roof hatch

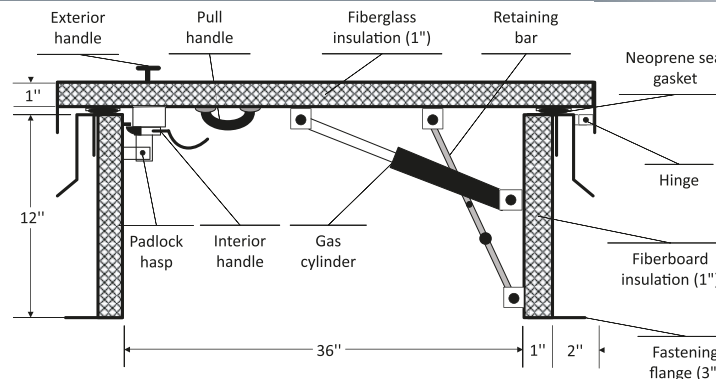

ROOF HATCH

TRH

INSTALLATION: ROOF ONLY

LEED ready: This product contributes to LEED® credits.

DESCRIPTION AND MATERIAL SPECIFICATION

- Cover:** 14 gauge galvalume steel with 1" fiberglass insulation
- Curb:** 14 gauge galvalume steel with 1" fiber board insulation
- Seal:** "D" - foam adhesive gasket provides a flush and tight fit
- Finish:** high quality white powder coat primer
- Components:** 2 gas cylinders, retaining bar handles

LEED®: When painted white, the TRH could contribute to meeting SS07.2 (Heat Island Effect) requirements for highly reflective roofing materials.

POPULAR OPTIONS

Material:

For complete list of options
go to: www.BestRoofHatches.com
aluminum

TOLL FREE PHONE:
1-800-431-8651

EMAIL:
info@bestroofhatches.com

FAX:
1-888-828-6021

www.BestRoofHatches.com

